

DuoFoamTM with SELF SEAL

For Use Under

- Laminate
- Engineered Wood

Installation Methods


- Floating Floors



**COST
EFFICIENT**



**MOISTURE
PROTECTION**



**SELF-SEAL
INSTALLATION**

INSTALLATION METHODS

FLOATING FLOORS

1. Roll out underlayment vapor barrier side up and butt seams together
2. Tape seams with provided lip & self seal tape
3. Click & lock floating floors over the top according to manufacturer

*ENSURE TO READ THE COMPLETE INSTALLATION INSTRUCTIONS BEFORE INSTALLATION

ADVANTAGES

- Polyethylene Foam with special moisture resistant film
- Economical
- Humidity, Mold and Mildew resistant
- Patented Lip & Tape strip for additional moisture protection and ease of installation
- Made with recycled materials.

LIMITATIONS


DuoFoam is not suitable for use as underlayment for:

- Ceramic tile
- Carpet
- Sheet-vinyl
- VCT

Installations over concrete in high moisture areas (vapor emission rate above 3 lbs/ 1000 sq ft/ 24 hrs) will require additional protection such as a concrete sealant or polyethylene vapor barrier.

APPROVED SUBSTRATES

- Dry, completely cured concrete (at least 28 days old)
- Concrete and masonry blocks
- Cement backer units (CBU)
- Cementitious screeds, leveling coats and mortar beds
- Waterproofing and crack-isolation membranes
- Double layered exterior-grade plywood 1 ¼" (32 mm) total thickness, for residential floors and in dry areas only.
- Cement terrazzo floors

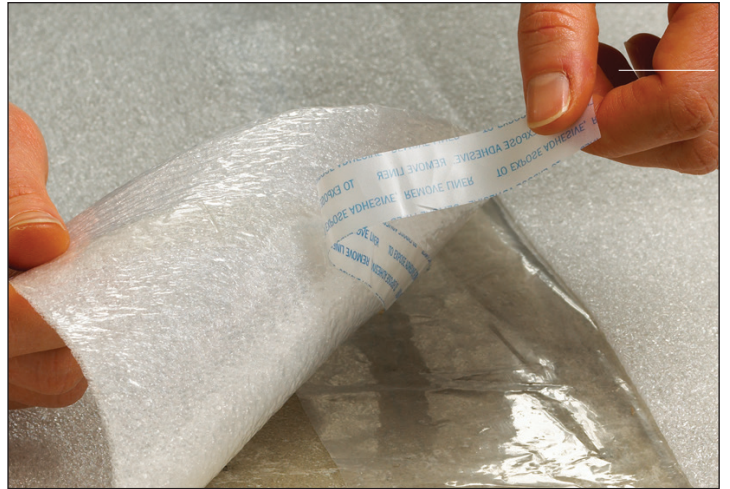

TECHNICAL DATA

Product Thickness 2 mm
 Density 1.4#
 WVTR.....6.95 g/m²/24 hour day (.45 g/100in²/ 24 hour day)

SOUND PROPERTIES

NOT AVAIABLE FOR THIS PRODUCT

PACKAGING

40" x 30.03' (100 sq ft) do-it-yourself size rolls
LTL Qty: 15 rolls per box / 8 boxes per pallet / 120 rolls per pallet
Truckload Qty: 15 rolls per pallets / 10 boxes per pallet / 150 rolls per pallet

Stock Colors: White foam and clear film

