

QUIETWALK® VERSA


UNDERLAYMENT & WATER DEFENSIVE BARRIER

Designed for use with:

- Vinyl Plank
- Laminate
- Hardwoods & Bamboo
- Duravana® Hybrid Resilient

* Provides enhanced performance for attached pad flooring

-  Click/Float
-  Nail Down
-  Glue Down

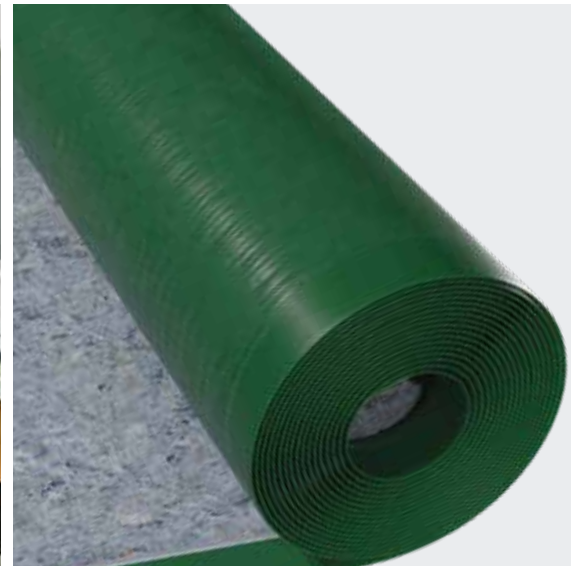

ENHANCED PERFORMANCE FOR
PAD ATTACHED FLOORING



Water Protection



Resists Compression From Daily Traffic



Sound Reduction



Insulating Value



Made From Recycled Materials




Antimicrobial Treated Fibers



Recommended For Pad Attached Flooring

For floors you WANT to live on
USE QuietWalk Versa

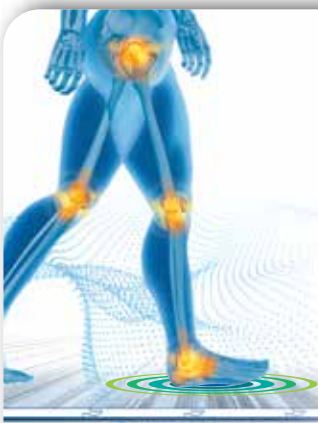

- **PROVEN** To Increase Comfort By Reducing Force To Your Joints*
- Minimizes Impact Energy & Sound Transmission
- Supports Your Floor, Especially With Pad Attached Planks

*2022 university study

Customer Reviews

★★★★★

"Good underlayment for sound and moisture control. It is also treated with an antimicrobial. The underlayment is thin but dense and made of recycled materials. It rolls out smoothly on the floor not retaining the rolled up shape. Used on concrete floor with floating laminate and the sound insulation is very good."

★★★★★

Absolute Must Have

"Absolutely love it. Even though the flooring didn't require it, it makes a tremendous difference. I've completed 4 rooms with it and 1 room without it and the difference is significant."

★★★★★

Sturdy, and cushy

"Great padding for under luxury vinyl plank."



Scan to view installation videos, warranty and tips!




RATED RESIDENTIAL AND COMMERCIAL

PROUDLY
Made in the U.S.A.

UNMATCHED TOP & BOTTOM SIDE WATER PROTECTION



Antimicrobial treated recycled fiber pad attacks subfloor moisture by wicking and dispersing it throughout the pad, drawing it up and away

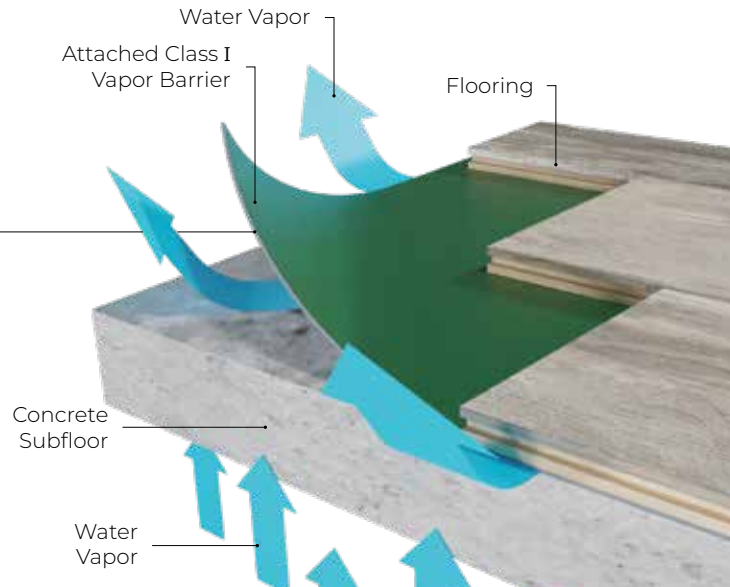

SUPERIOR SOUND ABSORPTION

QuietWalk Versa's dense, patented fiber construction absorbs and controls both impact and ambient sound to create a comfortable living space for everyone!

Industry leading IIC Δ Delta: 28



(STC) 62
8" concrete with ceiling assembly
AMBIENT SOUND
The higher the STC number, the better the noise control!



(IIC) 70
8" concrete with ceiling assembly
IMPACT SOUND
The higher the IIC number, the better the noise control!



SMOOTHS MINOR SUB-FLOOR IMPERFECTIONS

Firm and supportive but flexible enough to form around subfloor surface roughness which helps to cut down on extra subfloor surface prepping time. Provides extra support for planks even with pad attached.



SUITABLE FOR USE WITH IN-FLOOR HEATING SYSTEMS



RECYCLED FIBERS

Post industrial/pre-consumer fibers.



LEED[™] CREDITS

MR 4.1 10% recycled content, MR 4.2 20% recycled content, MR 5.1 10% content manufactured within 500 miles of project, MR 5.2 20% content manufactured within 500 miles of project, MR 6 Rapidly renewable resource EQ 4.3 low emitting VOC's, may contribute to MRc4.1-4.2 and EQc4.3 (Low-Emitting Materials)



GREENGUARD GOLD certified for low emissions, conforming to Indoor Air Quality standards and Collaborative for High Performance Schools (CHPS) - CA Section 01350.



ADDS INSULATION VALUE

Helps home insulation and provides additional comfort during seasonal changes by adding an **R-Value of 0.53** to a floor system!



SUPPORT FOR PAD ATTACHED FLOORING

Dense, uncrushable, construction provides continuous support to the seam and click together mechanism where pre-attached pads can't reach, preventing damage and giving your floors the support they need to handle everyday life!



TECHNICAL DATA

- **Materials:** Blended recycled synthetic fibers, polyethylene film and inert hot-melt adhesive
- **Lip & Tape Included:** Yes
- **Antimicrobial Protection:** Yes
- **Weight:** 9lbs/100ft² roll • 30lbs/360ft² roll
- **Thickness:** 1.4mm
- **Density:** 18.28lbs/ft³
- **Compression Set:** 8.8%
- **Compression Resistance:** 64.58psi
- **R-Value (@ 1.4mm):** 0.53hr-ft²-degF/Btu
- **WVTR:** 0.12lbs/1000ft² /24hrs
- **Perm Rating:** 0.06
- **Subfloor Moisture Emissions Allowance:** NO LIMIT
- **Approved Subfloors:** All properly prepared concrete and wood materials
- **Flammability:** Meets or exceeds Federal Flammability Standards: 1-70 (Pill Test)
- **Warranty:** Transferable LTD Lifetime



Scan to view installation videos, warranty and tips!

RATED RESIDENTIAL AND COMMERCIAL



Scan for current pallet & truck configurations, or visit www.mpglobalproducts.com/packout-information/